

562

Choose Smarter.
Choose FBD.®


FROZEN
FBD BEVERAGE
DISPENSERS

562 SPECIFICATIONS



2-Barrel Dispenser

(Shown with standard door. Customized solutions available.)

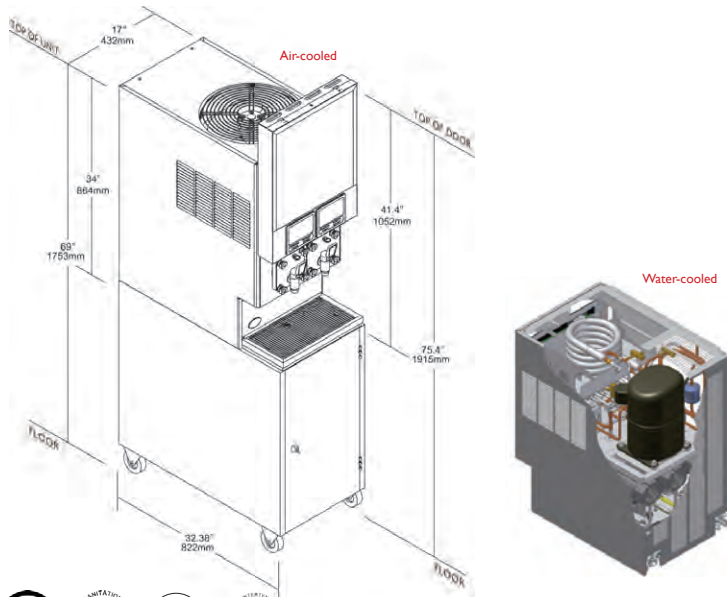

FBD strives for continuous improvements and engineering innovations.
Equipment design and/or specifications may change without notice.

FBD – Frozen Beverage Dispensers
8161 Interchange Parkway, Suite 115 • San Antonio, TX 78218
210.637.2800 • 1.866.323.2777 • Fax: 210.637.2832 • www.fbdfrozen.com
Copyright © 2011 by FBD Partnership, LP, All Rights Reserved.

DIMENSIONS

Countertop unit
Width: 17 in (432mm)
Depth: 32.38 in (822 mm)
Height: 41.4 in (1052 mm)
(with merchandiser door)

Unit on base cart
Height: 75.4 in (1915 mm)
(with merchandiser door)

ELECTRICAL REQUIREMENTS

215 to 245VAC, single phase; 3 wire, 30 amp (50Hz)
or 20 amp (60 Hz); uses NEMA # L-620R receptacle
Refrigeration unit:
19,000 BTU/Hr, R-404A (50Hz)
15,000 BTU/Hr, R-404A (60Hz)

SPACE REQUIREMENTS

Sides or back: 2 in (51 mm) minimum
Top: 12 in (305 mm)

WEIGHT

Operating unit: 345 lb (156.5 kg)
Base cabinet: 80 lb (36.3 kg)

SYRUP CONNECTION

Bag-In-Box (BIB)

MOTORS

Beater: (2) 1/6 HP
Fan: (1) 1/6 HP

WATER REQUIREMENTS

Fresh water, minimum 3/8" supply

OPTIONAL ACCESSORIES

Base cabinet w/casters (Part # 12-2493-0001)
Leg kit (set of four) (Part # 12-2533-0001)
Painted or stainless steel side panels
Water-cooled unit
Various door options (see spec sheet)
Remote condenser (see spec sheet)

THE ULTIMATE PROFIT DISPENSER

