

# 564



Choose Smarter.  
Choose FBD.®

FROZEN  
**FBD** BEVERAGE  
DISPENSERS



## 4-Barrel Dispenser

(Shown with standard door. Customized solutions available.)

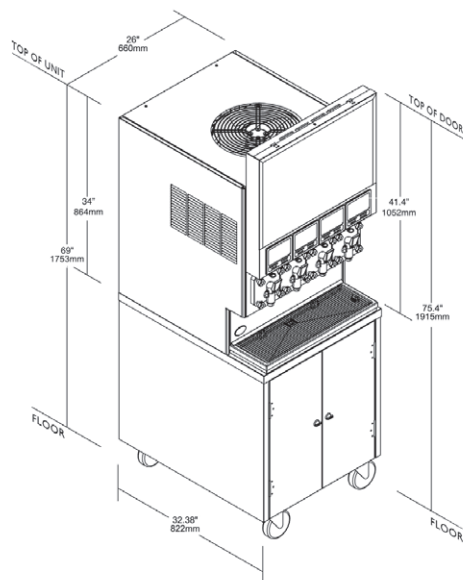

FBD strives for continuous improvements and engineering innovations.  
Equipment design and/or specifications may change without notice.

**FBD** – Frozen Beverage Dispensers  
8161 Interchange Parkway, Suite 115 • San Antonio, TX 78218  
210.637.2800 • 1.866.323.2777 • Fax: 210.637.2832 • [www.fbd-frozen.com](http://www.fbd-frozen.com)  
Copyright © 2011 by FBD Partnership, LP, All Rights Reserved.

## 564 SPECIFICATIONS

### DIMENSIONS

Countertop unit  
Width: 26 in (660mm)  
Depth: 32.38 in (822 mm)  
Height: 41.4 in (1052 mm)  
(with merchandiser door)

Unit on base cart  
Height: 75.4 in (1915 mm)  
(with merchandiser door)

### ELECTRICAL REQUIREMENTS

215 to 245VAC, single phase; 3 wire, 30 amp;  
uses NEMA # L-630R receptacle  
Refrigeration unit:  
21,000 BTU/Hr, R-404A (50Hz)  
19,000 BTU/Hr, R-404A (60Hz)

### SPACE REQUIREMENTS

Sides or back: 2 in (51 mm) minimum  
Top: 12 in (305 mm)

### WEIGHT

Operating unit: 460 lb (208.7 kg)  
Base cabinet: 80 lb (36.3 kg)

### SYRUP CONNECTION

Bag-In-Box (BIB)

### MOTORS

Beater: (4) 1/6 HP  
Fan: (1) 1/12 HP

### WATER REQUIREMENTS

Fresh water, minimum 3/8" supply

### OPTIONAL ACCESSORIES

Base cabinet w/casters (Part # 12-2899-0001)  
Leg kit (set of four) (Part # 12-2533-0001)  
Painted or stainless steel side panels  
Water-cooled unit (as shown)  
Various door options (see spec sheet)  
Remote condenser (see spec sheet)

