



FBD Partnership, LP | 866.323.2777 | sales@fbdfrozen.com | fbdfrozen.com

352 SPECIFICATIONS

DIMENSIONS

Countertop unit: Width: 17 in (432 mm)

Depth: 27 in (686 mm) Height: 34 in (864 mm)

CAPACITY (60Hz)

Barrel size: 146 oz

Instant draw: (1 barrel) 510 oz/hour

Continuous draw: (alternating barrels): 960 oz/hour

Recovery time: 7 minutes

ELECTRICAL REQUIREMENTS

200 to 254 VAC (50Hz), 10 amps 103 to 127 VAC (60Hz), 20 amps

REFRIGERATION

5,250 BTU/Hr, R-404A(50Hz) 5,950 BTU/Hr, R-404A(60Hz)

SPACE REQUIREMENTS

Sides and back: 2 in (51 mm) minimum Top: 12 in (305 mm)

WEIGHT

Operating unit: approx. 220 lb (99.8 kg) Base cabinet: 67 lbs (30.4 kg)

SYRUP CONNECTION

Bag-In-Box (BIB)

MOTORS

Beater: (2) 1/6 HP (120 w) Fan: (1) 1/2 HP (65 w) 1/12 HP (65 w)


WATER REQUIREMENTS

Fresh water, minimum 3/8" supply, 30 psi flowing (207 kPa)

OPTIONAL ACCESSORIES

Base cabinet (12-2493-0007) Leg kit (12-2533-0001) Painted or stainless panels



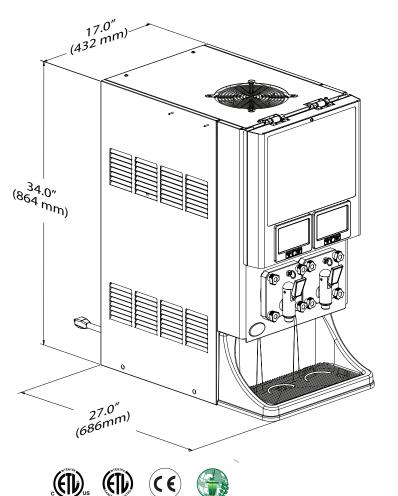







PRODUCT FEATURES



- InlineCarbonation™ creates consistent over-run, quality and yield
- AccuFreeze[™] delivers the most consistent frozen beverages
- RapidFreeze[™] Cold Chamber system improves recovery and draw-time, while reducing compressor run-time
- *Electronic Simplicity* offers easy-to-use keypad interface
- Optimal Use of Counter Space with minimum ventilation of two inches side or back
- Simple Design delivers Extreme Reliability using fewer parts
- Dispense carbonated or noncarbonated beverages with individual barrels using simple on-the-spot conversion
- Scroll™ Compressor provides more reliable operation than reciprocating compressors with fewer moving parts

